

## EFFECTS OF EGR & MAGNETIC FUEL TREATMENT SYSTEM ON ENGINE EMISSION CHARACTERISTICS IN A BIO FUEL ENGINE

P. Govindasamy<sup>1</sup> and S. Dhandapani<sup>2</sup>

<sup>1</sup>Department of Mech. Engg., Kongu Engg. College, Perundurai, Tamilnadu, India

<sup>2</sup>Institute of Technology, Coimbatore, Tamilnadu, India

### ABSTRACT

The depletion of fossil fuels and the increase in the emission levels has caused a concern globally. An eco-friendly alternate was required to fulfill the growing demand. Bio fuels have proved to be the best alternative. The overall performance and emission tests have given good results except for the NO<sub>x</sub> component of the emission. This experimental work focuses on the reduction of this component to a great extent with the implementation of techniques called Exhaust Gas Recirculation and Magnetic Fuel Treatment system

**Keywords:** Alternative Fuel, Magnetization, Engine, Emission.

### 1. INTRODUCTION

Today the world has realized that fossil diesel stock will almost come to an end within a few decades and if alternatives to these are found out, our vehicles would soon have a new eco friendly fuel to be used in the future. Bio diesel, due to its biodegradable nature, and essentially no sulphur and aromatic contents, offers to reduce particulate and toxic emissions (Avinash kumar agarwal, 2002). Bio diesel when mixed with diesel fuel in small quantities also seems to improve the fuel lubricity, extend engine life and reduce fuel consumption.

Jatropha oil is used as an alternative to diesel. This oil is chosen because it has properties (table 1) similar to that of diesel and mixing with the petroleum diesel would be really easy. Due to higher cetane number and lubricating properties (Gerhard Vellguth, 1983), this fuel gives good performance with any diesel engine. While analyzing the emissions in Jatropha oil and comparing with that of diesel, all the components in the emission got reduced drastically except NO<sub>x</sub>. This work mainly focuses on the methodology of reducing the emission of NO<sub>x</sub> using the technique called Exhaust Gas Recirculation (Avinash kumar agarwal, 2003).

The emissions in general like CO, HC etc., can be reduced (Ruggero, 2000) by fuel magnetization. The fuel is polarized to enhance the mixing of the air and fuel thereby producing a complete combustion. The idea that magnetizing hydrocarbon fuel can improve combustion and engine efficiency has been around since at least the 1930s. In 1936, Chinese fishermen are said to have been

applying magnets to engine fuel lines in fishing boats in order to improve fuel economy (Busch, K.W ,1976).

Table 1: Properties of Jatropha oil

Density (g cm <sup>-3</sup> at 20°C)	0.879
Flash point (°C)	191
Fire point (°C)	207
Cetane number	57-62
Viscosity(mm <sup>2</sup> /s at 40°C)	4.20
Calorific value (MJ/L)	32.80




A report entitled, "Investigation of the effects of the use of Magno-Flo magnets on diesel engines", by Dr Joe Cheung, of the Bolton Institute School of Engineering, shows improvements from 5% to 10% in fuel consumption in an engine under load.

In order to study magnetic field effect on fuel oil, kinematic viscosities of fuel oils were measured. From the results of measurement, the analysis was carried out to clarify whether magnetic effect on fuel oils exists or not. Magnetic effects on fuel oils were significant over 95% and especially significant when the magnetic field of 2500 or 9500 gauss was used

### 2. MECHANISM OF NOX FORMATION

A major hurdle in understanding the mechanism of formation and controlling its emission is that combustion is highly heterogeneous and transient in diesel engines.

NO is formed during the post flame combustion process in a high temperature region. The most widely accepted mechanism was suggested by Zeldovich (Heywood 1988). The principal source of NO formation is the oxidation of the nitrogen present in atmospheric air. The nitric oxide formation chain reactions are initiated by atomic oxygen, which forms from the dissociation of oxygen molecules at the high temperatures reached during the combustion process. The principal reactions governing the formation of NO from molecular nitrogen are



Formation of NO<sub>x</sub> is almost absent at temperatures below 2000 K. Hence any technique, that can keep the instantaneous local temperature in the combustion chamber below 2000 K, will be able to reduce NO<sub>x</sub> formation.

### 3. EGR- NOX REDUCTION TECHNIQUE

Exhaust Gas Recirculation is a process developed to reduce a type of harmful air pollution. It is primarily used as an emissions control device on fuel driven engines. EGR systems control the amount of NO<sub>x</sub> expelled from the exhaust of an engine by controlling the temperature of the combustion chamber. Specifically, under heavy engine loads, the internal temperature becomes ideal to create oxides of nitrogen.

Re introducing an inert gas into the combustion process to keep the temperatures down - mainly the Carbon Dioxide, which the engine already expels, does reducing NO<sub>x</sub>. The system is mechanically simple as it is nothing more than a valve, which taps the exhaust gasses and plumbs it into the engines intake manifold (figure 2).

### 4. MAGNETIC FUEL TREATMENT SYSTEM

The magnetic fuel treatment system is fabricated with a stand containing a fuel tank to hold the charged fuel. It also consists of a radiator core, 9500 Gauss (figure 1) ferrite permanent magnet, a fuel pump and some piping. The flow is continuously maintained with the pump for circulation of the fuel for polarizing it (Mcneely, M, 1994).

These devices are external online installations without cutting or modifying the fuel pipes and the magnetic energy generated through the monopole is rendered concentric and exactly perpendicular to the flow of the fuel.

The most important factors in the monopole technology are the magnetic field intensity and the collimation (Marshall, S.V, 1987) of the magnetic lines of flux. The intensity of the magnetic field is far superior to that generated by regular permanent magnets and the collimation of the magnetic fields renders the magnetic lines of flux exactly parallel to each other (Ruggero, 2000) at extremely high densities (to the order of millions of lines of flux per sq. cm.).


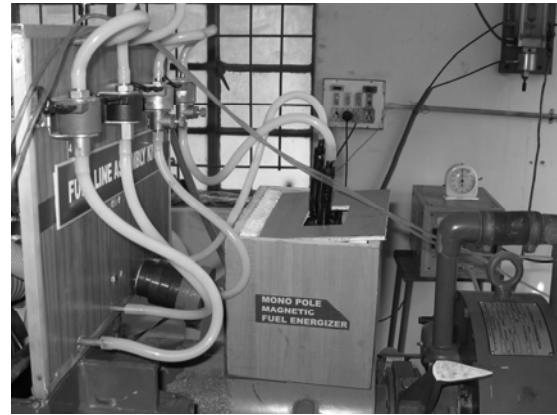


Fig 1. Experimental setup of fuel treatment system

### 5. EXPERIMENTAL PROCEDURE

The following steps were followed in approaching the above said problem of emissions and scope for Jatropha oil in the future as an alternate fuel.

1. Single cylinder four stroke water cooled electrically loaded engine with AVL five gas analyzer and AVL smoke meter was preferred for experiments.
2. The Jatropha oil was procured and blends of 50% and 100% bio diesel were prepared for the testing purpose.
3. A permanent magnet of 2500 Gauss was used in the fuel line, which was used to energize the fuel before injection. Another conditioning magnet of 9500 Gauss was also used in case of bio diesel.
4. EGR system was fabricated with heat exchanger like cooling system to cool the exhaust gas before recirculation
5. Engine modification for EGR was made.

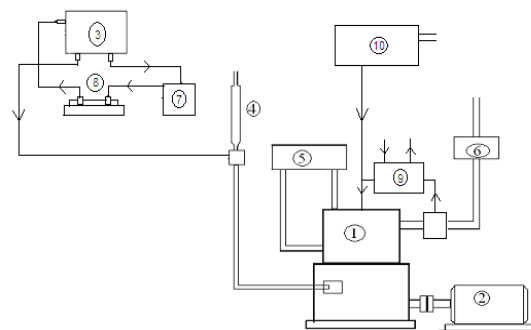

1. Engine 2. Alternator 3. Fuel Tank 4. Fuel metering tube 5. Cooling water Thermometer 6. Exhaust Gas Thermometer 7. Fuel pump 8. Permanent Magnet 9. EGR 10. Air box

Fig 2. Schematic diagram of experimental setup

6. The performance tests and the heat balance tests have been carried out to compare the various

blends and their performance with each other was carried out for the following

- Without any engine modification.
  - With implementation of EGR.
  - Without the fuel conditioning setup.
  - With the fuel conditioning setup
7. A comparison study between the performance of the blends and the emission comparison is also presented.

## 6. CONCLUSIONS

From the experimental results the following conclusions were made:

- The mechanical efficiency of the engine while using Bio diesel is more than the conventional petroleum diesel (figure 6). When the percentage of Bio diesel increases the mechanical efficiency also increases simultaneously. With EGR, the mechanical efficiency was found to increase by 13%.
- No considerable change in the value of the torque was noticed. The torque remained almost the same for all the blends irrespective of EGR.
- There was no considerable change in the value of the brake mean effective pressure though the value of the 50% blend was closer when compared to other blends. The energized blends were also closer to diesel.
- There was a slight decrease in indicated thermal efficiency while using EGR and with various blends of Bio diesel. However, the presence of the magnetic fuel treatment has increased the values by about 5%.
- Other performance characteristics of the diesel engine running with Bio diesel almost remained same with the implementation of EGR and magnetic fuel conditioning.
- The emission of  $\text{NO}_x$  came down drastically with the use of EGR (figure 5). It was zero in some cases. The CO and HC values got reduced with the implementation of the monopole technology (figure 3 & 4).

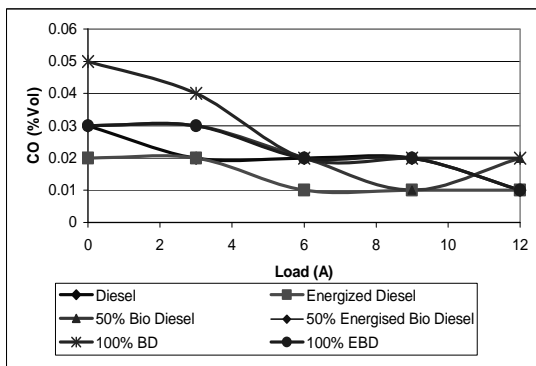


Fig 3. Variation of CO with load (Amps)

With a magnetic field we can increase the internal energy of the fuel, to cause specific changes at a molecular level. Increasing the internal energy means to obtain easier combustion. The molecules fly apart easier, join with oxygen easier and ignite well.

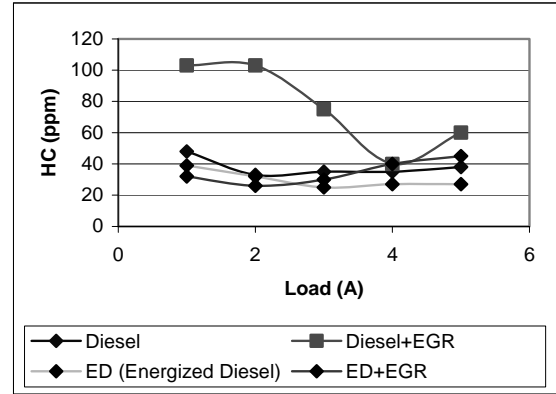


Fig 4. Variation of HC with load(Amps)

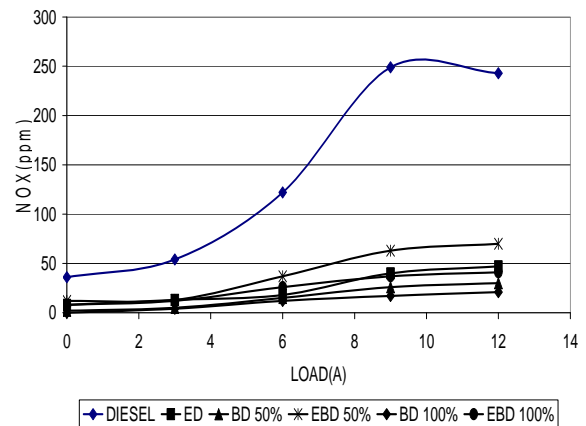


Fig 5. Variation of NOx with load (Amps)

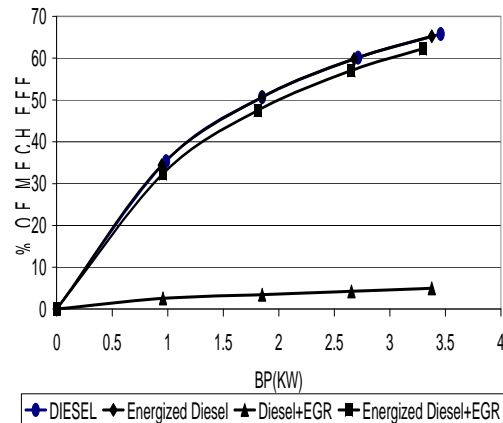


Fig 6. Variation of mechanical efficiency with brake power

The resultant conditioned fuel is magnetized to burn more completely, producing higher engine output, better fuel economy, more power and most importantly reduces the amount of hydrocarbons and carbon monoxide in the exhaust.

Finally, it is concluded that the use of EGR is more effective with the bio diesel and the magnetic fuel treatment system for the diesel for achieving improved emission performance of the engine.

#### ACKNOWLEDGEMENT

We are very grateful for the experimental setup funded by AICTE (All India Council for Technical Education, New Delhi, India). We thank Dr. M.A.Veluswami, Formerly professor, IIT, Chennai, for his guidance towards solving experimental complexity of the work.

#### 7. REFERENCES

1. Ashok K.Raina and B.R.Gaikwad, 2001, "Chemo-Botany of Jatropha species in India", *Publication of Godrej soaps Research Centre, Mumbai, India*
2. Avinsh Kumar Agarwal and Shrawan Kumar Singh, 2003, "Effects of EGR on exhaust gas temperature in CI engine", *Transactions, Indian Institute of Technology, Kanpur, India*
3. Avinsh Kumar Agarwal and L.M.Das, 2002 "Biodiesel development and characterization for use as a fuel in compression ignition engines", *Transactions, Indian Institute of Technology, Kanpur, India*
4. Busch, K.W., Busch, R.E. Darling, S. 1976 "Design of a test loop for the evaluation of magnetic water treatment devices. Process safety and environmental protection", *Transactions of the Institution of Chemical Engineers*
5. Gerhard Vellguth, 1983 "Performance of vegetable oils and their monoesters as fuel for diesel engines", *SAE Paper no. 831358, U.S.A.*
6. Gopalkrishna K.V. and Rao P.S. 2000, "Use of non-edible vegetable oils as alternate fuels in diesel

engines", *DNES Project report, I.C.Engines lab, IIT Madras, Chennai, India*

7. Marshall, S.V., and G.G. Skitek , 1987 "Electromagnetic Concepts and applications", 2<sup>nd</sup> ed. *Englewood Cliffs, N.J: Prentice-Hall, Inc.*
8. Mcneely, M,1994,"Magnetic fuel treatment system designed to attack fuel-borne microbes", *Diesel Progress Engines and Drives.*
9. Pitterson, D. J., 1966, "Cylinder Pressure Variations - Fundamental Combustion Problem", *Society of Automotive Engineers*
10. Ruggero Maria Santilli, 2000,"Recycling liquid wastes and Crude oil into Magnegas and Magne Hydrogen", *Hydrogen International Conference Hy2000, Munich, German.*
11. Samuel, S, Austin, L & Morrey, M, 2002,"Automotive test drive cycles for emission measured and real-world emission levels", *I Mech E Proceedings*
12. Vinayak patil and Kanwarjit singh.,2001, "Oil gloom to oil boom (Jatropha Curcas)", *published by Agro-forestry Federation, Maharashtra, India*
13. Proceedings of the XVIII National conference on IC engines and combustion held at College of Engineering, Thiruvanthpuram, India under the auspices of *the Combustion Institute (Indian Section).*
14. National conference proceedings on Alternative & Renewable energy Technologies held at *Indian Institute of Technology Kanpur, India*

#### 8. MAILING ADDRESS

P. Govindasamy  
Professor and Head,  
Department of Mech. Engg., Kongu Engg. College,  
Perundurai, Tamilnadu, India.